


**Carefree EZ FIT** Pleated Blinds can be fitted to most windows that have an internal rubber seal. It is important to measure accurately (especially the width) to within 1 mm.

**MEASURING INSTRUCTIONS**

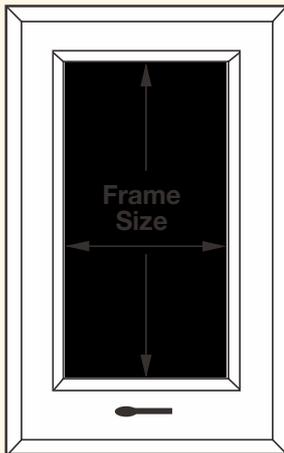


The blind is designed to fit inside the frame. Measure the exact frame\* width and drop.

\* If the rubber seal is visible in from the frame, measure the visible glass size.

**FITTING INSTRUCTIONS**




**STEP 1**  
 Clip the EZ Fit Bracket into the insertion tool and push bracket into the frame between the glass and the rubber seal.

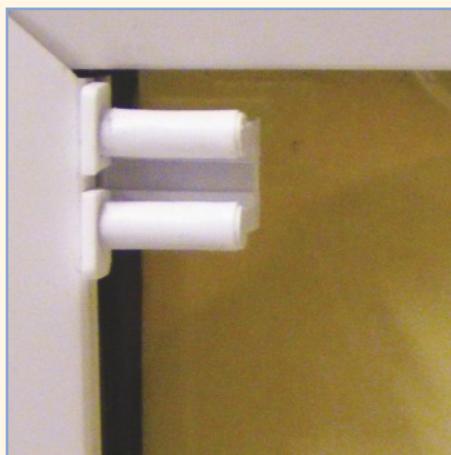

**STEP 2**  
 Fit the EZ Fit Brackets into the four corners of the frame.

**USEFUL TIPS**

It helps installation if you smear a little washing up liquid onto the bracket. Use a flathead screwdriver and hammer to tap brackets right in to corners of the frame.

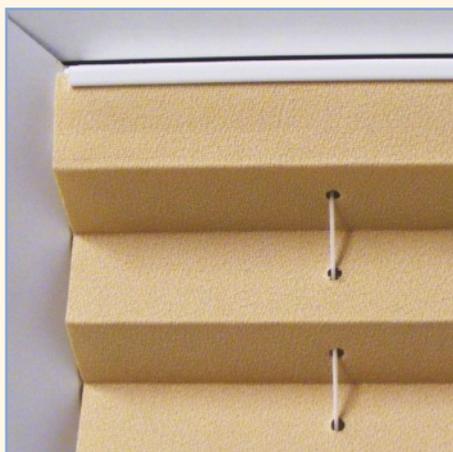

**STEP 3**  
 Clip the top rail of the blind onto the brackets and repeat procedure for bottom rail.

**TENSIONING THE BLINDS**

Your blinds should have been tensioned to the correct size at the factory. The cord which runs through the blind needs to be under tension on the spring in the bottom rail for the blind to stay in position and may on occasions need adjusting. To alter the tension on the blinds, with the blind fitted to the window locate the spring which is in the bottom rail. To operate correctly and hold the blind in any position there needs to be tension on this spring. To alter the tension untie the cord from one side of the spring (one side should have been left with a longer 'tail' this will be the easiest side to untie). Then simply move the cord along until there is tension on the spring and re tie it. Excess cord may now be trimmed off.

## **CARING FOR YOUR BLINDS**

The tension on the blinds can occasionally require adjustment. If the blinds fail to hold in the open or partially closed position they will need re-tensioning. Simply follow the procedure under 'Tensioning' overleaf.

### **REMOVING THE BLINDS**

The blinds can be removed from the windows for cleaning purposes. Simply prise the rails off the brackets at each corner taking care not to damage the rails or your conservatory.

### **CLEANING THE BLINDS**

Pleated window blinds do not normally collect dust etc. Pleated blind fabric is NOT washable however small marks can be removed by dabbing or gently scrubbing with a damp (NOT WET) cloth. Do NOT rub hard as this can damage the fabric. We find that a babywipe is ideal for this

If you require any assistance please don't hesitate to contact us on 01205 461661