


MEASURING INSTRUCTIONS


For all made to measure blinds except INTU and EZ Fit (see separate instruction sheets for these)

USE A STEEL TAPE MEASURE

MEASURE ALL WINDOWS, NEVER ASSUME THAT WINDOWS ARE THE SAME SIZE EVEN IF THEY APPEAR TO BE SO

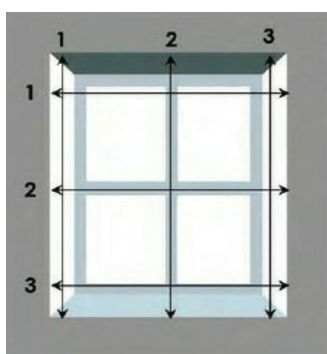

Inside Recess

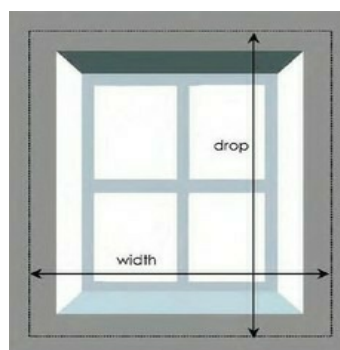

Outside Recess

Before measuring consider any obstructions such as dado rails tiles etc which will have an impact on the fitting your blinds and take these into account when measuring.

Firstly decide whether the blind will be fitted inside the window recess or outside. For inside recess fitting you will need to take the full recess measurement from wall to wall and order as '*recess size*'. We will make the necessary adjustments. For outside recess fitting you will need to measure the exact area you need the blind to cover (width and drop) and order as '*blind size*'.

Inside recess

Take firstly the width and then the drop measurements in 3 places as shown and order as the the smallest measurement.

TIP. Ensure that one of your width measurements is taken at the very top of the window recess where the blind will actually fit. It is surprising how many windows narrow slightly at the top.

Outside recess

We recommend allowing approx. 60 - 75mm overlap coverage all around the window. Measure the width and drop required allowing for this overlap

PLEASE NOTE on roller blinds the actual fabric width will be approx 30mm less than the recess size or overall blind size.

PLEASE NOTE THAT RECESS SIZE OR BLIND SIZE ARE THE ONLY MEASUREMENTS WE ARE ABLE TO WORK FROM.

IF YOU ARE NOT USING OUR ORDER SHEETS OR WEBSITE TO ORDER PLEASE STATE ALL SIZES AS WIDTH X DROP

Please see overleaf for details of control and fixing options

Please see our other measuring guide for measuring in conservatories and bay windows

MEASURE CAREFULLY - WE CANNOT BE RESPONSIBLE FOR BLINDS WHICH DO NOT FIT DUE TO INCORRECT MEASURING

FOR FURTHER ADVICE OR ASSISTANCE PLEASE CONTACT US

Tel 08444 412247 Email sales@blinds247.com




CONTROLS & BRACKETS INFORMATION


VERTICAL BLINDS

CONTROL & DRAW OPTIONS


The controls on your vertical blinds can be placed on either the right and or left hand side and you have the options below for the draw or stack of the blind.



Left Draw
or stack



Right Draw
or stack



Split Draw
or stack

BRACKETS



Face Fix Clips



Top Fix Brackets

With vertical blinds you have the choice of 2 bracket types. Top fix clips which fit into the top of the recess and face fix brackets which connect to the window frame. Face fix brackets are usually used for conservatory fixings. Top fix brackets give the neatest fixing in windows with a recess but you do need to drill up into the lintel so if you have concrete lintels you will need a good quality hammer drill.

ROLLER BLINDS

CONTROL OPTIONS

Our roller blinds are fitted with a sidewinder clutch operated by chain to move the blind up and down. This can be placed on either side of the blind.

BRACKETS



Our roller blind brackets have multiple fixing options and can be fixed into the top of the recess, face fixed to the window frame and side fixed to the side wall of a recess

ALUMINIUM VENETIAN BLINDS

CONTROL OPTIONS

The standard configuration of a venetian blind is the lift cord on the right and the tilt wand on the left. If you wish these positions can be reversed or both controls can be placed on the same side of the blind.

BRACKETS



Aluminium venetian blinds are supplied with a swivel bracket which can be top fixed or face fixed.

WOODEN VENETIAN BLINDS

CONTROL OPTIONS

The control mechanisms on all of our wooden venetian blinds are in fixed positions and alternatives CANNOT be specified. These are the lift and raise cords on the right and the the tilt cords on the left.

BRACKETS



Our wooden venetian blinds are fixed with box brackets at each end of the blind with intermediate 'U' shaped brackets for wider blinds. The end brackets have multiple fixing options and can be top, face or side fixed with the intermediate brackets being suitable for face or top fixing.

PLEASE NOTE. All control options are as viewed from inside

FOR FURTHER ADVICE OR ASSISTANCE PLEASE CONTACT US

Tel 08444 412247 Email sales@blinds247.com

